

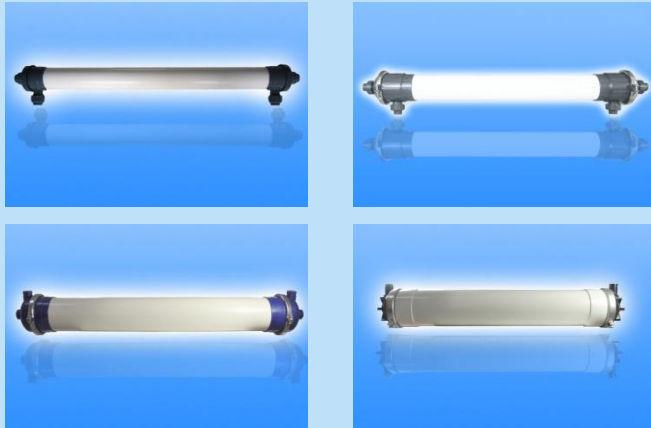


# EWP Pressurized Modules

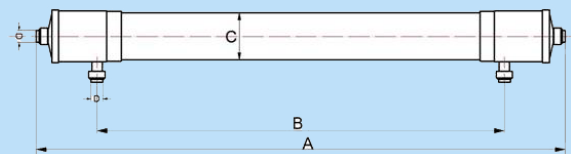

Pressurized UF Modules

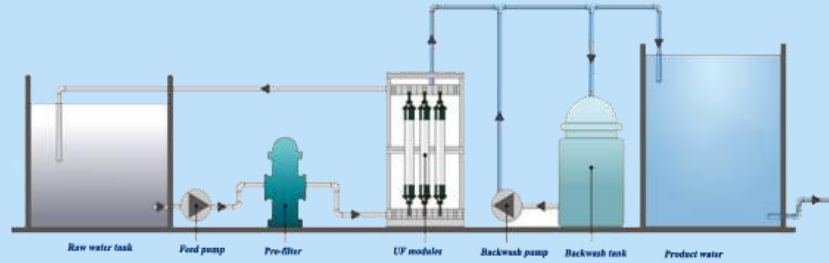

## Specifications

Model		EWP-UF-0440N	EWP-UF-0660N	EWP-UF-0860N	EWP-UF-1060N
Dimensions	A(mm)	1160	1800	1884	1874
	B(mm)	960	1643	1720	1727
	C(mm)	Φ90	Φ160	Φ200	Φ250
	D(mm)	Φ100	Φ196	Φ244	Φ283
	E(mm)	DN25	DN40	DN50	DN50
Spec	Membrane Material	H-PES			
	MWCO	6000-150000Da			
	Membrane Area (m <sup>2</sup> )	4.5	28	40	60
	Filtration Mode	Inside-out			
	Housing Material	UPVC, ABS			
	Specification	4"	6"	8"	10"
	Inlet / Outlet Size (mm)	DN25	DN45	DN50	DN50
Performance Parameter	Design Flux (m <sup>3</sup> /h)	0.3-1.0	1.5-3.0	2.0-4.0	3.0-6.0
	Operating Pressure(MPa)	0.02~0.20			
	Operating Temp. (°C)	5~45			
	pH	2~13			
	Back Washing Flux(m <sup>3</sup> /h)	[Permeate Flux]*3			
	Back Washing Pressure(MPa)	0.1~0.2			
	Permeate Turbidity(NTU)	<0.1			
	Removal of Bacteria	>6log			
	SDI	<3			

## Application Fields

- Drinking Water Production
- Tertiary Treatment of Sewage Water
- RO Pretreatment in Seawater Desalination
- Industrial Water Production
- Reuse of Industrial Waste Water

**EWP**

*Your Water Partner*